


SPECIFICATION:


1. Rating: 10A 250VAC
2. Insulation resistance: DC 500V 100M Ω (min)
3. Dielectric strenght: 2000 VAC/1 minute
4. Housing material: nylon # 66 UL 94V-2 or 94V-0
5. Safety approval:




RL10-1F2

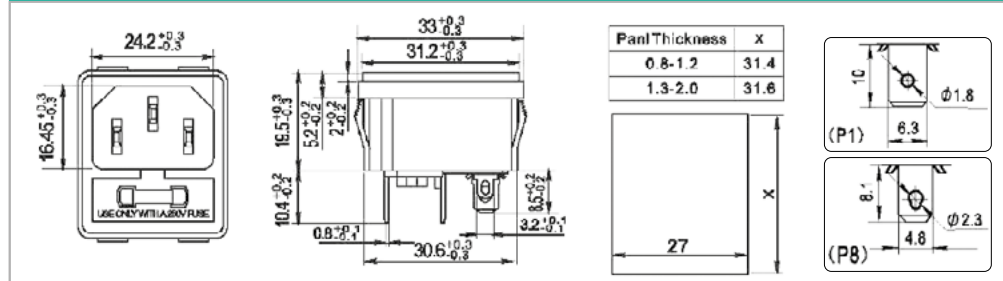


RL10-1FS2

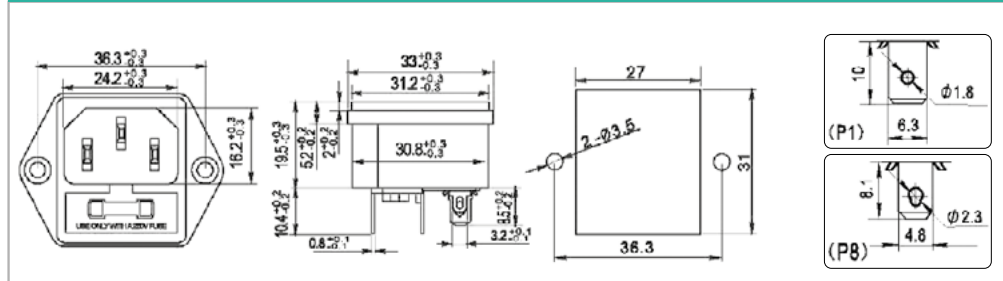

RL10-1

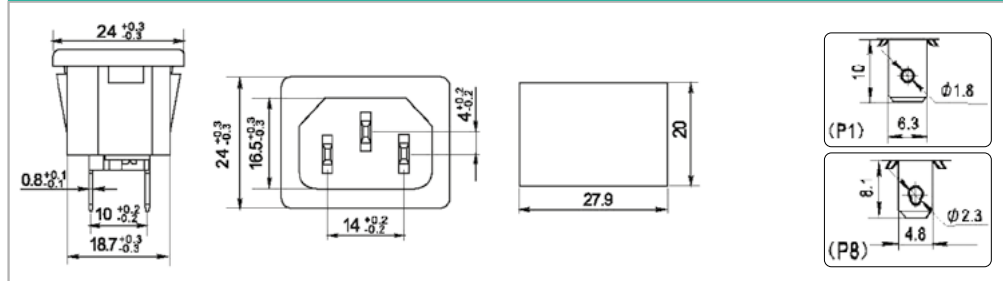

RL10-1S

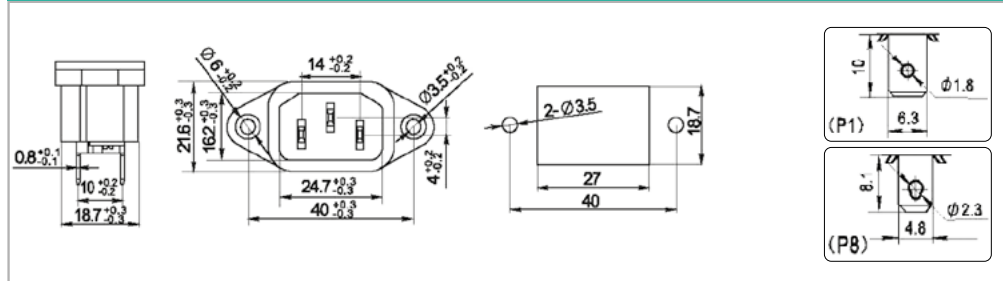

RL10-1G

